



PLUG IN ADAPTOR

5W Series

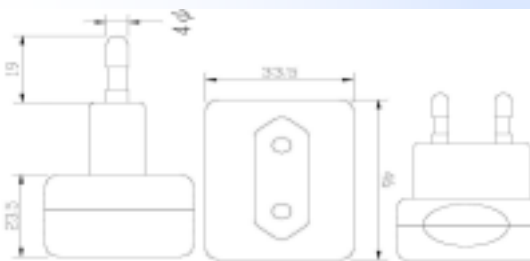


GFP051T

LxWxH=46x33.5x23.5

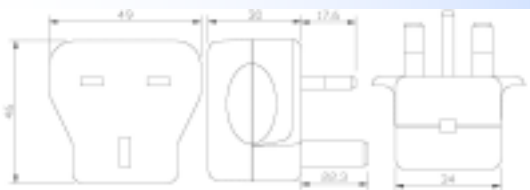

GFP051K

LxWxH=49x46x30



GFP051U

GFP051J

LxWxH

44x32x22.5

MODEL NO	OUTPUT VOLTAGE	OUTPUT CURRENT
GFP051X-0315	3V	1.5A
GFP051X-A315	3.3V	1.5A
GFP051X-4207	4.2V	0.7A
GFP051X-4212	4.2V	1.2A
GFP051X-4505	4.5V	0.5A
GFP051X-4510	4.5V	1A
GFP051X-0505	5V	0.5A
GFP051X-0510	5V	1A
GFP051X-0610	6V	1A
GFP051X-7508	7.5V	0.8A

GENERAL SPECIFICATIONS:

Input voltage: AC 100~240V 50/60Hz

Operating Temperature: 0 40 Operating Relative

Humidity: 5-95%RH Storage Temperature: -20 85

Insulation Resistance: DC500V 100M (Min.)(between Input & Output)

Efficiency: 70%Min. At 110Vac and full load

Safety: U:UL , J:PSE , K,T:GS,CE