
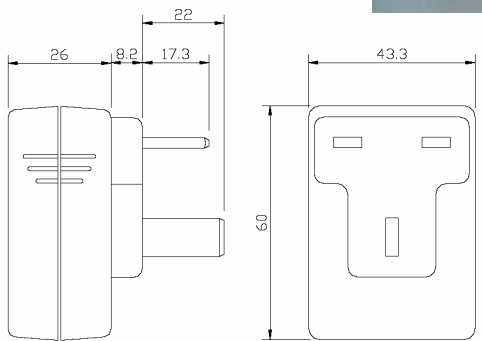



PLUG IN ADAPTOR

12W Series

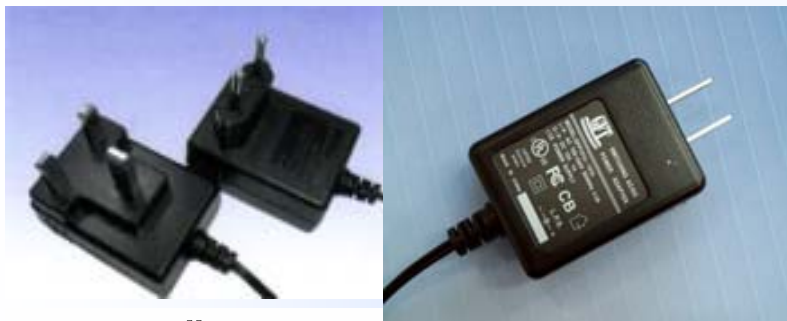

GFP121K


DIMENTION: LxWxH=60x43.3x26

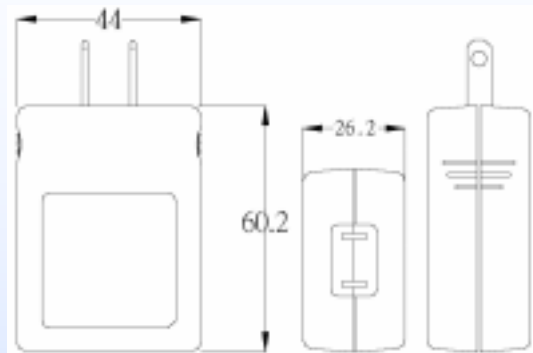

GFP121U

DIMENTION: LxWxH=60.2x44x26.2

MODEL NO	OUTPUT VOLTAGE	OUTPUT CURRENT
GFP121X-0320	3V	2A
GFP121X-A320	3.3V	2A
GFP121X-0520	5V	2A
GFP121X-0620	6V	2A
GFP121X-0913	9V	1.3A
GFP121X-1012	10V	1.2A
GFP121X-1210	12V	1A
GFP121X-1508	15V	0.8A

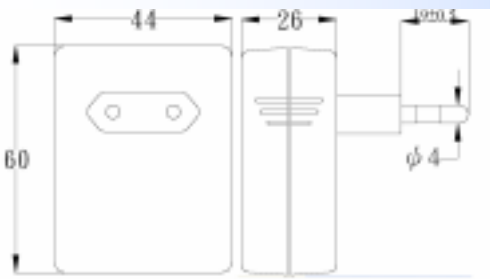

GFP121T

DIMENTION: LxWxH=60x44x26

GENERAL SPECIFICATIONS:

Input voltage: AC 100~240V 50/60Hz

Operating Temperature: 0 40 Operating Relative

Humidity: 5-95%RH

Storage Temperature: -20 85

Insulation Resistance: DC500V 100M (Min.)

(between Input & Output))

Efficiency: 70%Min. At 110Vac and full load

Safety: GFP121U: UL,CUL,FCC,PSE GFP121T&K: GS,CB,CE