



# PLUG IN ADAPTOR

## 15W Series

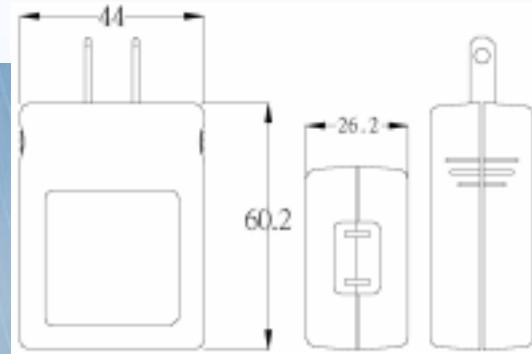

**GFP151U**


**DIMENTION: LxWxH=60.2x44x26.2**

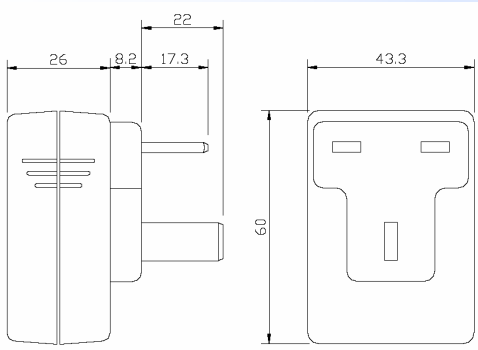

**GFP151K**

**DIMENTION: LxWxH=60x43.3x26**

MODEL NO	OUTPUT VOLTAGE	OUTPUT CURRENT
GFP151X-0325	3V	2.5A
GFP151X-A325	3.3V	2.5A
GFP151X-0525	5V	2.5A
GFP151X-0623	6V	2.3A
GFP151X-0916	9V	1.6A
GFP151X-1015	10V	1.5A
GFP151X-1212	12V	1.25A
GFP151X-1510	15V	1A

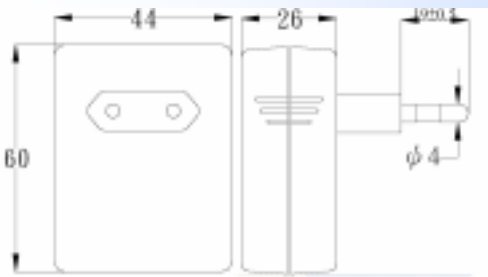

**GFP151T**

**DIMENTION: LxWxH=60x44x26**

### GENERAL SPECIFICATIONS:

Input voltage: AC 100~240V 50/60Hz

Operating Temperature: 0 40 Operating Relative

Humidity: 5-95%RH

Storage Temperature: -20 85

Insulation Resistance: DC500V 100M (Min.)

(between Input & Output))

Efficiency: 70%Min. At 110Vac and full load

Safety: GFP151U: UL,CUL,FCC ,PSE GFP151T&K: GS,CB,CE