



PLUG IN ADAPTOR

18W Series

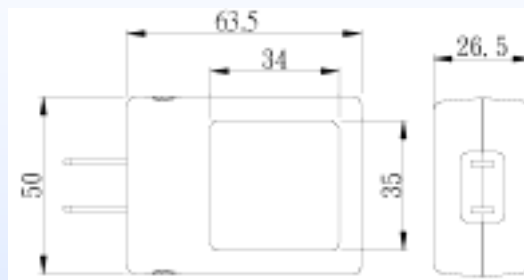


GFP181U

DIMENTION: LxWxH=63.5x50x26.5

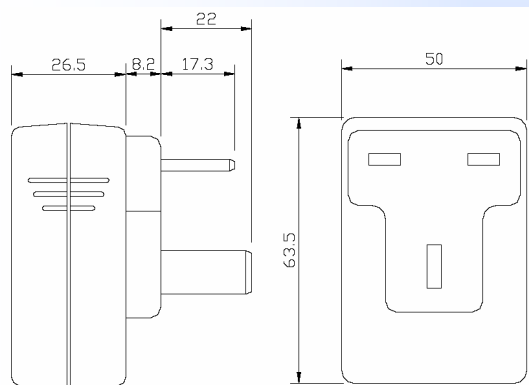

GFP181K

DIMENTION: LxWxH=63.5x50x26.5

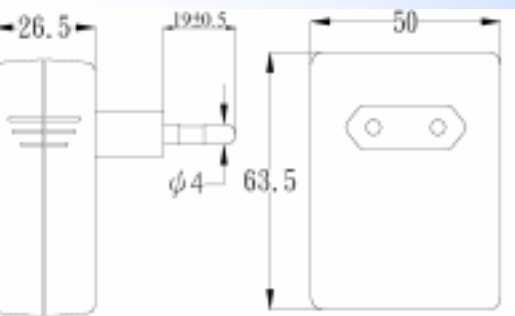

GFP181T

DIMENTION: LxWxH=63.5x50x26.5

MODEL NO	OUTPUT VOLTAGE	OUTPUT CURRENT
GFP181X-0330	3V	3A
GFP181X-A330	3.3V	3A
GFP181X-0530	5V	3A
GFP181X-0628	6V	2.8A
GFP181X-0920	9V	2A
GFP181X-1018	10V	1.8A
GFP181X-1215	12V	1.5A
GFP181X-1512	15V	1.2A
GFP181X-2407	24V	0.75A

GENERAL SPECIFICATIONS:

Input voltage : AC 100~240V 50/60Hz

Operating Temperature: 0 40 Operating Relative

Humidity: 5-95%RH

Storage Temperature: -20 85

Insulation Resistance: DC500V 100M (Min.)

(between Input & Output))

Efficiency: 70%Min At 110Vac and full load

Safety: GFP181U: UL,CUL,FCC,PSE GFP181T&K: GS,CB,CE